

# **FnIO M – Series :**

## ***M4428***

***M4428 (8 Channels , Voltage Output, 0~10V, 12bit)***

# Specification

---

## Table of Contents

<a href="#">Table of Contents.....</a>	<a href="#">2</a>
<a href="#">History.....</a>	<a href="#">3</a>
<a href="#">1.ENVIRONMENT SPECIFICATION.....</a>	<a href="#">4</a>
<a href="#">2.M4428 (8 Channels Voltage Output, 0~10V, 12bit).....</a>	<a href="#">5</a>
<a href="#">2.1.M4428 Specification.....</a>	<a href="#">5</a>
<a href="#">2.2.M4428 Wiring Diagram.....</a>	<a href="#">6</a>
<a href="#">2.3.M4428 LED Indicator.....</a>	<a href="#">7</a>
<a href="#">2.3.1.LED Indicator.....</a>	<a href="#">7</a>
<a href="#">2.3.2.Channel Status LED.....</a>	<a href="#">7</a>
<a href="#">2.3.3.Data value / Voltage.....</a>	<a href="#">7</a>
<a href="#">2.4.Mapping data from the image table.....</a>	<a href="#">8</a>
<a href="#">2.5.Parameter Data.....</a>	<a href="#">9</a>

# Specification

## History

REV.	PAGES	REMARKS	DATE	Editor
-		Preliminary	2018/6/18	BS HA
1.00			2019/03/18	YM KIM
1.01		Image, Torque, Hotswap Function	2020/04/21	CW SEO
1.02		Vibration specification, Product certification changed	2020/04/27	CW SEO
1.03	11~15	Added ATEX certificate	2020/05/07	bs, HA
1.04		Remove Description pages of Hot Swap Function, Use in Hazardous Environments and Caution(Before using the unit)	2020/12/09	SJ LIM

# Specification

## 1. ENVIRONMENT SPECIFICATION

<b>Environmental specification</b>	
Operating Temperature	-25 °C~60 °C
UL Temperature	-20 °C~60 °C
Storage Temperature	-40 °C~85 °C
Relative Humidity	5% ~ 90% non-condensing
Mounting	DIN rail
<b>General specification</b>	
Shock Operating	IEC 60068-2-27
Vibration Resistance	Based on IEC 60068-2-6 DNVGL-CG-0039 : Vibration Class B, 4g
Industrial Emissions	EN 61000-6-4/A11 : 2011
Industrial Immunity	EN 61000-6-2 : 2005
Installation Position	Vertical and horizontal installation is available.
Product Certifications	CE, UL, FCC, ATEX, DNV

# Specification

## 2. M4428 (8 Channels Voltage Output, 0~10V, 12bit)


### 2.1. M4428 Specification

Items	Specification
<b>Output Specification</b>	
Outputs per module	8 Channels single ended
Indicators(Logic side )	1 Green Output status
Resolution in Ranges	12 bits : 2.44mV/Bit
Output Range	0 ~ 10Vdc
Data Format	16bits Integer (2' compliment)
Module Error	±0.1% Full Scale @ 25°C ±0.3% Full Scale @ -25°C, 60°C
Load Resistance	Min. 2KΩ
Conversion Time	Max. 250usec / All channel
Diagnostic	Field Power Off : LED Blinking Field Power On : LED On
Calibration	Not Required
Common Type	8 Common, Field Power 0V is Common(AGND)
<b>General specification</b>	
Power dissipation	Max. 30mA @ 5.0Vdc
Isolation	I/O to Logic : Photocoupler Isolation Field power : Not Connected
UL Field Power	Supply voltage : 24Vdc nominal, Class 2
Field Power	Supply voltage : 24Vdc Norminal Voltage range : 18V ~ 28.8Vdc Power Dissipation : Max. 120mA@24Vdc, Load(2KΩ)
Single Wire	0.205mm <sup>2</sup> - 1.3mm <sup>2</sup> (24-16 AWG)
Torque	0.8Nm(7 lb-in)
Weight	72g
Module Size	12mm x 110mm x 75mm
Hot Swap	Possible
<b>Environment Condition</b>	<b>Refer to '1. Environment Specification'</b>

\* Class 2, adjacent to voltage rating (30Vmax)

# Specification

## 2.2. M4428 Wiring Diagram

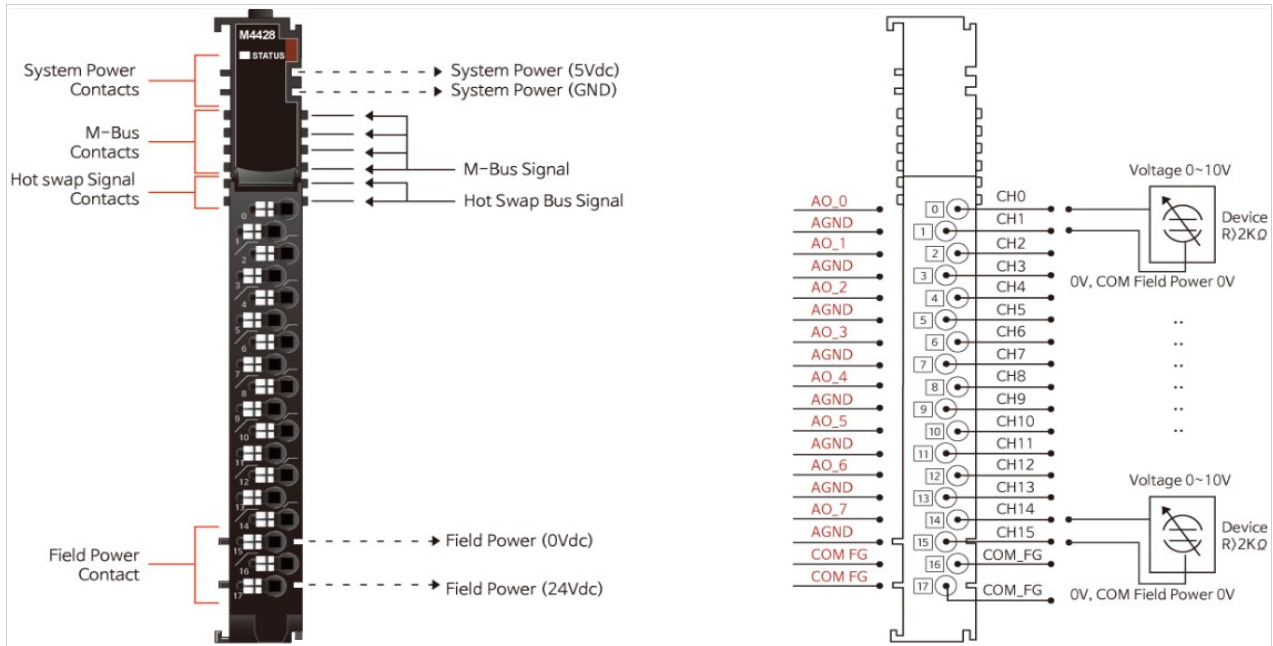

Pin No.	Signal Description
0	Output Channel 0
1	Common(AGND)
2	Output Channel 1
3	Common(AGND)
4	Output Channel 2
5	Common(AGND)
6	Output Channel 3
7	Common(AGND)
8	Output Channel 4
9	Common(AGND)
10	Output Channel 5
11	Common(AGND)
12	Output Channel 6
13	Common(AGND)
14	Output Channel 7
15	Common(AGND)
16	F.G
17	F.G

Series No	Through Air	Over Surface	CTI
RTB18C	1.5mm	1.5mm	175≤CTI≤400

Spacings : The following minimum spacing in inches(millimeters) shall be maintained between uninsulated live parts of opposite polarity; and between an uninsulated live part and a grounded Part including any mounting surface or exposed metal part.

## 2.3. M4428 LED Indicator

### 2.3.1. LED Indicator




LED No.	LED Function / Description	LED Color
STATUS	M-bus Status	Green

### 2.3.2. Channel Status LED

Status	LED	To indicate
M-Bus Status	Off	Disconnection
	Green	Connection
All Channel Repeat the Green and Off		Field power is unconnected.

### 2.3.3. Data value / Voltage


Voltage	0.0V	2.5V	5.0V	10.0V
Data(Hex)	H0000	H03FF	H07FF	H0FFF

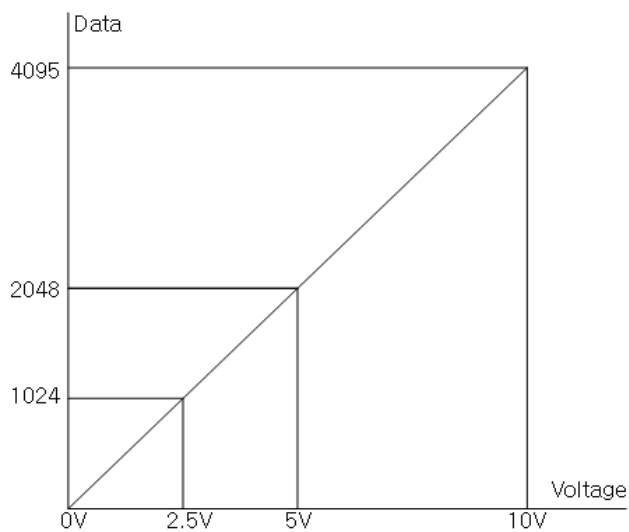

## 2.4. Mapping data from the image table

- **Output Image Value**

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte 0	Analog Output Ch0 Low byte							
Byte 1	Analog Output Ch0 High byte							
Byte 2	Analog Output Ch1 Low byte							
Byte 3	Analog Output Ch1 High byte							
Byte 4	Analog Output Ch2 Low byte							
Byte 5	Analog Output Ch2 High byte							
Byte 6	Analog Output Ch3 Low byte							
Byte 7	Analog Output Ch3 High byte							
Byte 8	Analog Output Ch4 Low byte							
Byte 9	Analog Output Ch4 High byte							
Byte 10	Analog Output Ch5 Low byte							
Byte 11	Analog Output Ch5 High byte							
Byte 12	Analog Output Ch6 Low byte							
Byte 13	Analog Output Ch6 High byte							
Byte 14	Analog Output Ch7 Low byte							
Byte 15	Analog Output Ch7 High byte							



- **Output Module Data -16byte Output Data**

Analog Output Ch0
Analog Output Ch1
Analog Output Ch2
Analog Output Ch3
Analog Output Ch4
Analog Output Ch5
Analog Output Ch6
Analog Output Ch7



# Specification

## 2.5. Parameter Data

- **Valid Parameter length: 4 Bytes**
- **Parameter Data**

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
<b>Byte0</b>	Fault Action for channel 3		Fault Action for channel 2		Fault Action for channel 1		Fault Action for channel 0	
	00: Fault Value 01: Hold last state 10: Low Limit 11:High Limit							
<b>Byte1</b>	Fault Action for channel 7		Fault Action for channel 6		Fault Action for channel 5		Fault Action for channel 4	
<b>Byte2</b>	Fault Value Low Byte							
<b>Byte3</b>	Not used				Fault Value High Byte			