

# **FnIO M – Series :**

## ***M4334***

***M4334 (4 Channels , Current Output, 4~20mA, 750ohm, 12bit)***

---

## Table of Contents

<a href="#">Table of Contents.....</a>	<a href="#">2</a>
<a href="#">History.....</a>	<a href="#">3</a>
<a href="#">1.ENVIRONMENT SPECIFICATION.....</a>	<a href="#">4</a>
<a href="#">2.M4334 (4 Channels Current Output, 4~20mA, 12Bit).....</a>	<a href="#">5</a>
<a href="#">2.1.M4334 Specification.....</a>	<a href="#">5</a>
<a href="#">2.2.M4334 Wiring Diagram.....</a>	<a href="#">6</a>
<a href="#">2.3.M4334 LED Indicator.....</a>	<a href="#">7</a>
<a href="#">2.3.1.LED Indicator.....</a>	<a href="#">7</a>
<a href="#">2.3.2.Channel Status LED.....</a>	<a href="#">7</a>
<a href="#">2.3.3.Data value / Current.....</a>	<a href="#">7</a>
<a href="#">2.4.Mapping data from the image table.....</a>	<a href="#">8</a>
<a href="#">2.5.Parameter Data.....</a>	<a href="#">8</a>

## History

REV.	PAGES	REMARKS	DATE	Editor
1.00		Preliminary	2022/8/30	Soyeong, Park
1.01	4, 7	Certificate Update and LED spec modified	2023/06/05	CW SEO

## 1. ENVIRONMENT SPECIFICATION

Environmental specification	
Operating Temperature	-25℃~60℃
UL Temperature	-20℃~60℃
Storage Temperature	-40℃~85℃
Relative Humidity	5% ~ 90% non-condensing
Mounting	DIN rail

General specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	IEC 60068-2-6, 4g
Industrial Emissions	EN 61000-6-4/A11 : 2011
Industrial Immunity	EN 61000-6-2 : 2019
Installation Position	Vertical and horizontal installation is available.
Product Certifications	UL, ATEX, CE, UKCA


## 2. M4334 (4 Channels Current Output, 4~20mA, 12Bit)

### 2.1. M4334 Specification

Items	Specification
<b>Output Specification</b>	
Outputs per module	4 Channels single ended
Indicators(Logic side )	1 Green Output status
Resolution in Ranges	12 bits : 3.91uA/Bit
Output Range	4~20mA
Data Format	16bits Integer (2' compliment)
Module Error	±0.1% Full Scale @ 25°C ±0.3% Full Scale @ -25°C, 60°C
Load Resistance	<750Ω., >550Ω
Dignostic	Field Power Off : Led Blinking Field Power On : Led ON
Conversion Time	Max. 200usec / All channel
Calibration	Not Required
Common Type	10 Common, Field Power 0V is Common(AGND)
<b>General specification</b>	
Power dissipation	Max. 50mA @ 5.0Vdc
Isolation	I/O to Logic : Photocoupler Isolation Field power : Non-Isolation
UL Field Power	Supply voltage : 24Vdc nominal, Class 2
Field Power	Supply voltage : 24Vdc Norminal Voltage range : 18V ~ 28.8Vdc Power dissipation : 80mA @ 24Vdc
Single Wire	0.205mm <sup>2</sup> - 1.3mm <sup>2</sup> (24-16 AWG)
Torque	0.8Nm(7 lb-in)
Weight	70g
Module Size	12mm x 110mm x 75mm
Hot Swap	Possible
<b>Environment Condition</b>	<b>Refer to '1. Environment Specification'</b>

\* Class 2, adjacent to voltage rating (30Vmax)

## 2.2. M4334 Wiring Diagram



Pin No.	Signal Description
0	Output Channel 0
1	Common(AGND)
2	Common(AGND)
3	Common(AGND)
4	Output Channel 1
5	Common(AGND)
6	Common(AGND)
7	Common(AGND)
8	Output Channel 2
9	Common(AGND)
10	Common(AGND)
11	Common(AGND)
12	Output Channel 3
13	Common(AGND)
14	Common(AGND)
15	Common(AGND)
16	Common(AGND)
17	Common(AGND)

Series No	Through Air	Over Surface	CTI
RTB18C	1.5mm	1.5mm	175≤CTI≤400

Spacings : The following minimum spacing in inches (millimeters) shall be maintained between uninsulated live parts of opposite polarity; and between an uninsulated live part and a grounded Part including any mounting surface or exposed metal part.

## 2.3. M4334 LED Indicator

### 2.3.1. LED Indicator




LED No.	LED Function / Description	LED Color
STATUS	Status LED	Green

### 2.3.2. Channel Status LED

Status	LED	To indicate
M-Bus Status	Off Green	Disconnection Connection
Field Power Error	LED Blinking	Field power is unconnected.

### 2.3.3. Data value / Current


Current	0.0mA	5.0mA	10.0mA	20.0mA
Data(Hex)	H0000	H03FF	H07FF	H0FFF

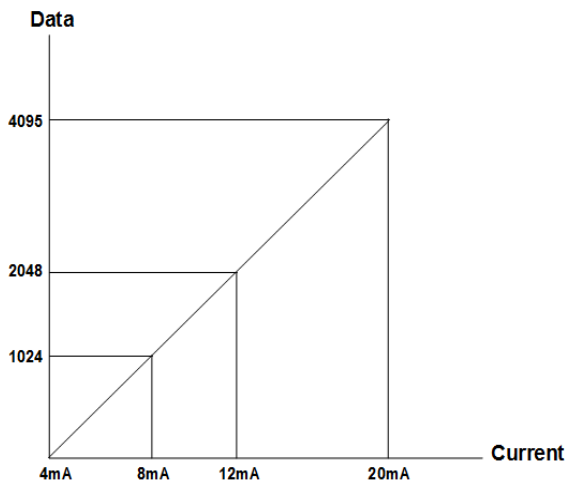

## 2.4. Mapping data from the image table

- Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte 0	Analog Output Ch0 Low byte							
Byte 1	Analog Output Ch0 High byte							
Byte 2	Analog Output Ch1 Low byte							
Byte 3	Analog Output Ch1 High byte							
Byte 4	Analog Output Ch2 Low byte							
Byte 5	Analog Output Ch2 High byte							
Byte 6	Analog Output Ch3 Low byte							
Byte 7	Analog Output Ch3 High byte							



- Output Module Data -8byte Output Data

Analog Output Ch0
Analog Output Ch1
Analog Output Ch2
Analog Output Ch3

## 2.5. Parameter Data

- Valid Parameter length: 4 Bytes
- Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Fault Action for channel 3		Fault Action for channel 2		Fault Action for channel 1		Fault Action for channel 0	
	00: Fault Value 01: Hold last state 10: Low Limit 11:High Limit							
Byte1	Not used							
Byte2	Fault Value Low Byte							
Byte3	Not used				Fault Value High Byte			